





Rakennustieto Oy

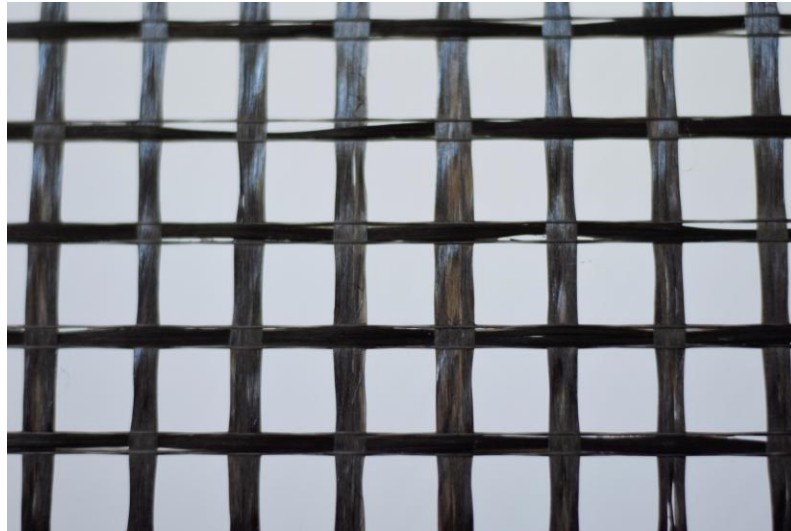

Basalt fibergrid

Program operator, publisher:	Rakennustieto Oy Malminkatu 16 A 00100 Helsinki cer.rts.fi/en/
Owner of the declaration:	Tolnatek Bt.
Name of the product:	Basalt fibergrid
Declaration number:	RTS_447_25
Registration number:	
ECO Platform reference number:	
Issue date:	10.12.2025 (revision 27.01.2026)
Valid to:	10.12.2025
Scope of the declaration	This environmental product declaration covers the environmental impacts of the Open weave fiberglass (AR glass) product. The declaration has been prepared in accordance with EN 15804:2012+A2:2019 and ISO 14025 standards and the additional requirements stated in the RTS PCR Protocol for drawing up Environmental Product Declarations of building products (SFS-EN 15804:2012 + A2:2019/AC:2021, version 121124). The Characterization Factors are based on EF 3.1 package. This declaration covers the life cycle stages from cradle-to-gate with options (modules A1-A3, C1-C4, and D).
	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  Jukka Seppänen RTS EPD Committee Secretary </div> <div style="text-align: center;">  Laura Apilo Managing Director </div> </div>
Verified according to the requirements of EN 15804:2012+A2:2019	
Independent verification of the declaration and data, according to ISO 14025:2010	
<input type="checkbox"/> Internal <input checked="" type="checkbox"/> External	
Third party verifier	Mari Kirss

Rakennustieto Oy

1. Owner of the declaration, manufacturer

TolnateX Bt.

Postal address and location: 7130 Tolna, Bezerédj Pál tér 1.

<https://www.tolnateX.hu/index.html>

Email: info@tolnateX.hu

2. Product name and number

Basalt fibergrid

3. Manufacturing plant

Tolna, Hungary

4. Description of the Product

The current business of TolnateX Bt. is mainly the manufacturing of a variety of technical glass fibre textiles. The machine pool, consisting of various machinery, makes it possible to manufacture textiles of several weave types, width, reel length, to apply special logos and to produce textiles with many other parameters. TolnateX Bt. possesses state-of-the-art weaving and knitting machines therefore TolnateX Bt. can also satisfy any unique requirements its partners might have.

The glass-grid fabrics are widely used in the construction industry whether building facades or for reinforcing asphalt roads and concrete. The roving fabrics are primarily used for manufacturing composite materials; while the fabrics combined with special copper fibre or carbon fibre form the raw material for advanced heating panels or heating foils.

5. Product Category Rules and the scope of the declaration

The declaration has been prepared in accordance with EN 15804:2012+A2:2019 and ISO 14025 and 14040/44 standards and the additional requirements stated in the RTS PCR Protocol for drawing up Environmental Product Declarations of building products (SFS-EN 15804:2012 + A2:2019/AC:2021, version 121124).

EPD of construction products may not be comparable if they do not comply with EN15804 and seen in a building context.

Rakennustieto Oy

6. Author of the life-cycle assessment and declaration

Csongor Bajnóczki, Dominika Szűcs, EY denkstatt Kft.

Hungary, 1132 Budapest, Váci road 20.

denkstatt@denkstatt.hu

<https://denkstatt.at/en>

7. Verification

This EPD has been verified according to the requirements of EN 15804:2012+A2:2019 and RTS PCR Protocol for drawing up Environmental Product Declarations of building products (SFS-EN 15804:2012 + A2:2019/AC:2021, version 121124) by a third party. The verification has been carried out by:

Mari Kirss, Product LCA/EPD Specialist

Meetripuu OÜ

mari.kirss@meetripuu.ee

8. Declaration issue date and validity

Declaration issue date is 22.10.2025. The declaration is valid 5 years.

9. Product description

The declaration has been conducted for Basalt fibergrid product manufactured in Hungary.

10. Environmental/hazardous properties

The Basalt fibergrid product is not dangerous. The basic and auxiliary materials used in the production of the product do not contain chemicals that are on the REACH list, the list of very hazardous substances (SVHC).

The final product is not expected to produce significant adverse health effects when the recommended instruction for use is followed.

Rakennustieto Oy

11. Raw materials of the product and product information

Product structure / composition / raw-material	quantity p%	Usability			Origin of the raw materials
		Renewable	Non-renewable	Recycled	
Glass yarn	<5%		X		EU/Middle East
Basalt yarn	60-70%		X		Asia
Metallic yarn	<10%		X		EU/Middle East
Chemicals	20-30%		X		EU

Product main composition, at least metals, stone materials, fossil materials, bio-based materials

Product structure / composition / raw-material	quantityp%*	Origin of the raw materials
Metal derivative	7%	EU/Middle East
Stone-based materials (minerals)	68%	EU/Middle East/Asia
Fossil materials	25%	EU
Bio-based materials	0%	N/A

*Order of magnitude, not exact composition

Mass inputs for the packaging materials for the Basalt fibergrid product:

Packaging materials	Weight, kg (per declared unit)
Plastic packaging: foils, adhesive tapes, strapping tape	0,01
Paper packaging	0,08
EUR wooden pallet	0,10

12. Declared unit

Indicators are for 1 kg of Basalt fibergrid product.

13. System boundary

Rakennustieto Oy

This EPD covers the following modules: Cradle-to-gate with modules C1–C4 and module D (A1–A3 + C + D).

The scenarios included are currently in use and are representative for one of the most likely scenario alternatives.

Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage
Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
x	x	x	ND ¹	ND	ND	ND	ND	ND	ND	ND	ND	x	x	x	x	x

	Mandatory modules
	Mandatory as per the RTS PCR section 6.2.3 rules and terms
	Optional modules based on scenarios

14. Cut-off criteria

A1 raw material supply, A2 transportation, A3 manufacturing. All used materials, energy, packaging, and transportation until the end-of-waste state have been included. The information from transportation A4 is included in the LCA-calculation, but is excluded from the present EPD, because the A4 module’s GWP (global warming potential) is below 20% of the GWP of modules A1–A3. Information from B-module has not been calculated nor included in the LCA-calculations. Modules C1 – C4 have been included. Module D is also included.

¹ The RTS PCR Guideline outlines that the environmental impacts of the A4 module must be declared if their GWP (global warming potential) is over 20% of the GWP of modules A1–A3; as per calculated during the LCA and displayed in the LCA background report, it is below 20% thus A4 does not need to be declared.

Rakennustieto Oy

15. Environmental impacts

Basalt fibergrid product

Results per declared unit											
Indicator	Unit	A1	A2	A3	Tot. A1-A3	A5	C1	C2	C3	C4	D
GWP-fossil	kg CO ₂ eq.	8,06E+00	6,19E-01	1,86E-02	8,70E+00	0,00E+00	6,13E-06	7,41E-03	0,00E+00	2,59E-05	0,00E+00
GWP-biogenic	kg CO ₂ eq.	-2,09E-01	4,17E-04	2,32E-01	2,32E-02	1,64E-01	6,12E-10	4,19E-06	0,00E+00	7,00E-08	0,00E+00
GWP-luluc	kg CO ₂ eq.	8,95E-03	2,23E-04	4,71E-06	9,18E-03	0,00E+00	5,33E-10	2,51E-06	0,00E+00	5,14E-08	0,00E+00
GWP-total	kg CO ₂ eq.	7,86E+00	6,20E-01	2,51E-01	8,73E+00	0,00E+00	6,13E-06	7,42E-03	0,00E+00	2,60E-05	0,00E+00
ODP	kg CFC 11 eq.	8,91E-08	1,22E-08	3,40E-10	1,02E-07	0,00E+00	9,38E-14	1,48E-10	0,00E+00	5,50E-13	0,00E+00
AP	mol H ⁺ eq.	3,76E-02	2,43E-03	9,63E-05	4,01E-02	0,00E+00	5,53E-08	2,33E-05	0,00E+00	1,48E-07	0,00E+00
EP-freshwater	kg P eq.	3,19E-03	4,43E-05	7,36E-06	3,24E-03	0,00E+00	1,79E-10	5,06E-07	0,00E+00	5,88E-09	0,00E+00
EP-marine	kg N eq.	7,53E-03	7,68E-04	4,51E-05	8,34E-03	0,00E+00	2,57E-08	7,85E-06	0,00E+00	5,25E-08	0,00E+00
EP-terrestrial	mol N eq.	7,59E-02	8,38E-03	3,49E-04	8,46E-02	0,00E+00	2,81E-07	8,54E-05	0,00E+00	5,66E-07	0,00E+00
POCP	kg NMVOC eq.	2,49E-02	3,40E-03	1,24E-04	2,84E-02	0,00E+00	8,38E-08	3,72E-05	0,00E+00	1,99E-07	0,00E+00
ADP-minerals&metals ¹	kg Sb eq.	7,16E-05	1,91E-06	4,24E-08	7,35E-05	0,00E+00	2,20E-12	2,32E-08	0,00E+00	8,30E-11	0,00E+00
ADP-fossil ¹	MJ	1,25E+02	8,79E+00	2,46E-01	1,34E+02	0,00E+00	8,02E-05	1,05E-01	0,00E+00	4,59E-04	0,00E+00
WDP	m ³	2,33E+00	4,51E-02	2,06E-03	2,38E+00	0,00E+00	1,96E-07	5,26E-04	0,00E+00	2,60E-06	0,00E+00
Acronyms	GWP-total = Global Warming Potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water depletion potential										
Disclaimer	¹ The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.										

Rakennustieto Oy

16. Use of natural resources

Basalt fibregrid product

Results per declared unit											
Indicator	Unit	A1	A2	A3	Tot. A1-A3	A5	C1	C2	C3	C4	D
PERE	MJ	1,28E+01	1,63E-01	0,00E+00	1,29E+01	-3,81E-01	4,91E-07	1,81E-03	0,00E+00	1,36E-05	0,00E+00
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	1,28E+01	1,63E-01	0,00E+00	1,29E+01	-3,81E-01	0,00E+00	1,81E-03	0,00E+00	1,36E-05	0,00E+00
PENRE	MJ	1,16E+02	8,79E+00	0,00E+00	1,25E+02	5,79E-02	8,02E-05	1,05E-01	0,00E+00	4,60E-04	0,00E+00
PENRM	MJ	8,53E+00	0,00E+00	- 4,55E+00	3,98E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	- 5,19E+00	0,00E+00
PENRT	MJ	1,25E+02	8,79E+00	- 4,45E+00	1,29E+02	5,79E-02	0,00E+00	1,05E-01	0,00E+00	- 5,19E+00	0,00E+00
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	2,33E+00	4,51E-02	2,06E-03	2,38E+00	0,00E+00	1,96E-07	5,26E-04	0,00E+00	2,60E-06	0,00E+00
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water										

17. End-of-life – Waste

Basalt fibregrid product

Results per declared unit											
Indicator	Unit	A1	A2	A3	Tot. A1-A3	A5	C1	C2	C3	C4	D
Hazardous waste disposed	kg	6,13E-01	1,31E-02	8,79E-04	6,27E-01	0,00E+00	8,96E-08	1,53E-04	0,00E+00	7,27E-07	0,00E+00
Non-hazardous	kg	1,65E+01	2,78E-01	1,42E+00	1,82E+01	0,00E+00	1,22E-06	3,21E-03	0,00E+00	1,00E+00	0,00E+00

Rakennustieto Oy

waste disposed											
Radioactive waste disposed	kg	3,44E-04	3,23E-06	0,00E+00	3,47E-04	0,00E+00	8,80E-12	3,44E-08	0,00E+00	2,96E-10	0,00E+00

18. End-of-life – Output flow

Basalt fibregrid product

Indicator	Unit	Results per declared unit									
		A1	A2	A3	Tot. A1-A3	A5	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Material for recycling	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

19. Key information table

Indicator	Unit	Basalt fibregrid product: Key information table (RTS) - Key information per 1 kg of product									
		A1	A2	A3	Tot. A1-A3	A5	C1	C2	C3	C4	D
GWP-total	kg CO ₂ eq.	7,86E+00	6,20E-01	2,51E-01	8,73E+00	1,64E-01	6,13E-06	7,42E-03	0,00E+00	2,60E-05	0,00E+00
ADP-minerals & metals	kg Sb eq.	7,16E-05	1,91E-06	4,24E-08	7,35E-05	0,00E+00	2,20E-12	2,32E-08	0,00E+00	8,30E-11	0,00E+00
ADP-fossil	MJ	1,25E+02	8,79E+00	2,46E-01	1,34E+02	0,00E+00	8,02E-05	1,05E-01	0,00E+00	4,59E-04	0,00E+00
WDP	m ³	2,33E+00	4,51E-02	2,06E-03	2,38E+00	0,00E+00	1,96E-07	5,26E-04	0,00E+00	2,60E-06	0,00E+00
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Biogenic carbon content in product	kg C	N/A	N/A	0,00E+00	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Biogenic carbon content in accompanying packaging	kg C	N/A	N/A	4,30E-02	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Acronyms	GWP-total = Global Warming Potential total; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption; SM = Use of secondary material										

20. Energy in the manufacturing phase

A3 Electricity information and CO ₂ emission kg CO ₂ -eq./kWh	electricity, low voltage, residual mix // HU, electricity, low voltage (Ecoinvent 3.10)	0,41 kg CO ₂ -eq./kWh
---	---	----------------------------------

21. End-of-life process description

C1: building demolition with skid-steer loaders, including energy for dismantling, particulate matter emissions from dismantling and handling.

C2: the following distances are assumed for the respective waste destinations:

- To the sorting facility – 50 km;
- To landfill – 50 km;

C3 and C4: the Basalt fibergrid products are sold over many European markets with varying levels of waste treatment services. One waste treatment scenario is modelled – for broad European context (100% market share). The table below summarises the total share of the of the Basalt fibergrid product by waste treatment.


- Collection rate: 100 %;
- Sanitary landfill: 100 %.

D: the product is landfilled at the end of its lifecycle, thus there is no calculation for module D.

Processes	Unit (expressed per declared unit)
Collection process specified by type	1 kg collected separately
Recovery system specified by type	0 kg for recycling (C3) 0 kg for recycling (C3) 0 kg material for incineration (C4)
Disposal specified by type	1 kg for sanitary landfill (C4)

Rakennustieto Oy

Processes	Unit (expressed per declared unit)
Assumptions for scenario development, e.g., transportation	The following distances are assumed for the respective waste destinations: <ul style="list-style-type: none"> - To the sorting facility – 50 km; - To landfill – 50 km;

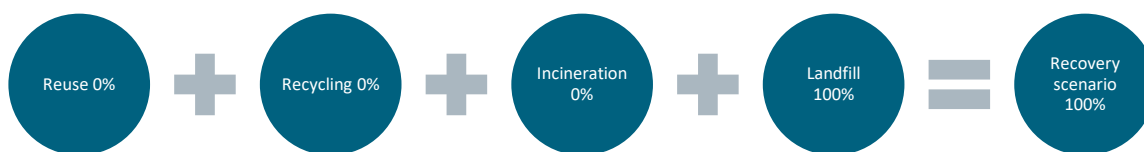

Product	Reuse of components	Recycling of material		Energy content	Disposal of product or material, including losses
		Recycling method	System boundaries (module D)		
Basalt fibergrid	Reused if meeting the requirements of the new application	N/A	N/A	N/A	Waste Basalt fibergrid goes to landfill for disposal.

22. Additional information

- a) emissions to soil
The information is not available.
- b) emissions to water
The information is not available.
- c) emissions to indoor air
The information is not available.

23. Product declaration

The information is available at the web pages, please see [link](#).

24. Information on biogenic carbon content

Rakennustieto Oy

Basalt fibergrid product

Results per declared unit		
BIOGENIC CARBON CONTENT	Unit	QUANTITY
Biogenic carbon content in product	kg C	0,00E+00
Biogenic carbon content in packaging	kg C	4,30E-02

25. Data Quality

The data quality assessment performed during the analysis was based on the Data quality level and criteria of the UN Environment Global Guidance on LCA database development.

The data quality information has been provided according to the requirements of EN 15941.

ISO 14044 was applied in terms of data collection and quality requirements. The data concerning the modules A1 (raw material supply), A2 (transportation) and A3 (product manufacturing) were provided by Tolnatext Bt. and involved all input and output materials to the plant, the consumed utilities (energy, water) and the distances and means of transport for each input stream. Data reliability is considered good for energy consumption, material inputs, material outputs, waste management and very good for transportation. Proxy had to be applied for two processes (Basalt yarn and module C1 deconstruction)

This LCA report is based on site-specific data from the manufacturer and is representative for the production for 2024 January – 2024 December (12-month period). The manufacturing location is in Tolna, Hungary. However, since the components are delivered by external suppliers, their production processes are modelled using data from the Ecoinvent 3.10 database.

In case of Glass yarn the characterization factor used is of poor quality in means of temporal representativeness. In case of Chemicals the characterization factor chosen are of very poor quality in means of temporal representativeness. However, these datasets are highly relevant in terms of technological representativeness to the materials.

Proxy data

Tolnatext applies various chemicals onto the fibres based on the orders of customers. However primary data was not available for these chemicals, therefore proxy data had to be applied. The most appropriate Ecoinvent characterization factor for these chemicals is ‘acrylonitrile-butadiene-styrene copolymer production’. It was averaged with ‘chemical production, organic’ and applied for the LCA calculation. The chemicals used during the manufacturing of products account for approximately 10-15% of GWP results. For this reason, it is important to emphasise that GWP results’ representativeness could be greatly influenced if characterization factors on chemicals could be obtained from primary data sources.

Rakennustieto Oy

26. References

Ecoinvent v3.10 database, 2023

EN 15804:2012+A2:2019 Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products, 2019

EN 15941 Sustainability of construction works - Data quality for environmental assessment of products and construction work - Selection and use of data

ISO 14040:2006 (E) Environmental management — Life cycle assessment — Principles and framework, 2006-07

ISO 14044:2006 + Amd 1:2017 Environmental management — Life cycle assessment — Requirements and guidelines, 2018

RTS EPD, general rules, 2020

RTS PCR Protocol for drawing up Environmental Product Declarations of building products (SFS-EN 15804:2012 + A2:2019/AC:2021, version 121124)

The Finnish RTS EPD programme RTS EPD Guideline - Programme operator The Building Information Foundation RTS sr According to the standard EN 15804, 18.2.2021

27. Revision History

	Date	Subject
1.	27.01.2026	<i>Product name change</i>